

Value of Imperfect Information

20

20.1 PRIOR PROBLEM BEFORE INFORMATION

Technometrics, Inc., a large producer of electronic components, is having some problems with the manufacturing process for a particular component. Under its current production process, 25 percent of the units are defective. The profit contribution of this component is \$40 per unit. Under the contract the company has with its customers, Technometrics refunds \$60 for each component that the customer finds to be defective; the customers then repair the component to make it usable in their applications. Before shipping the components to customers, Technometrics could spend an additional \$30 per component to rework any components thought to be defective (regardless of whether the part is really defective). The reworked components can be sold at the regular price and will definitely not be defective in the customers' applications. Unfortunately, Technometrics cannot tell ahead of time which components will fail to work in their customers' applications. The following payoff table shows Technometrics' net cash flow per component.

Figure 20.1 Payoff Table

Component Condition	Technometrics' Choice	
	Ship as is	Rework first
Good	+\$40	+\$10
Defective	-\$20	+\$10

What should Technometrics do?

How much should Technometrics be willing to pay for a test that could evaluate the condition of the component before making the decision to ship as is or rework first?

Figure 20.2 Solution of Prior Problem and EVPI

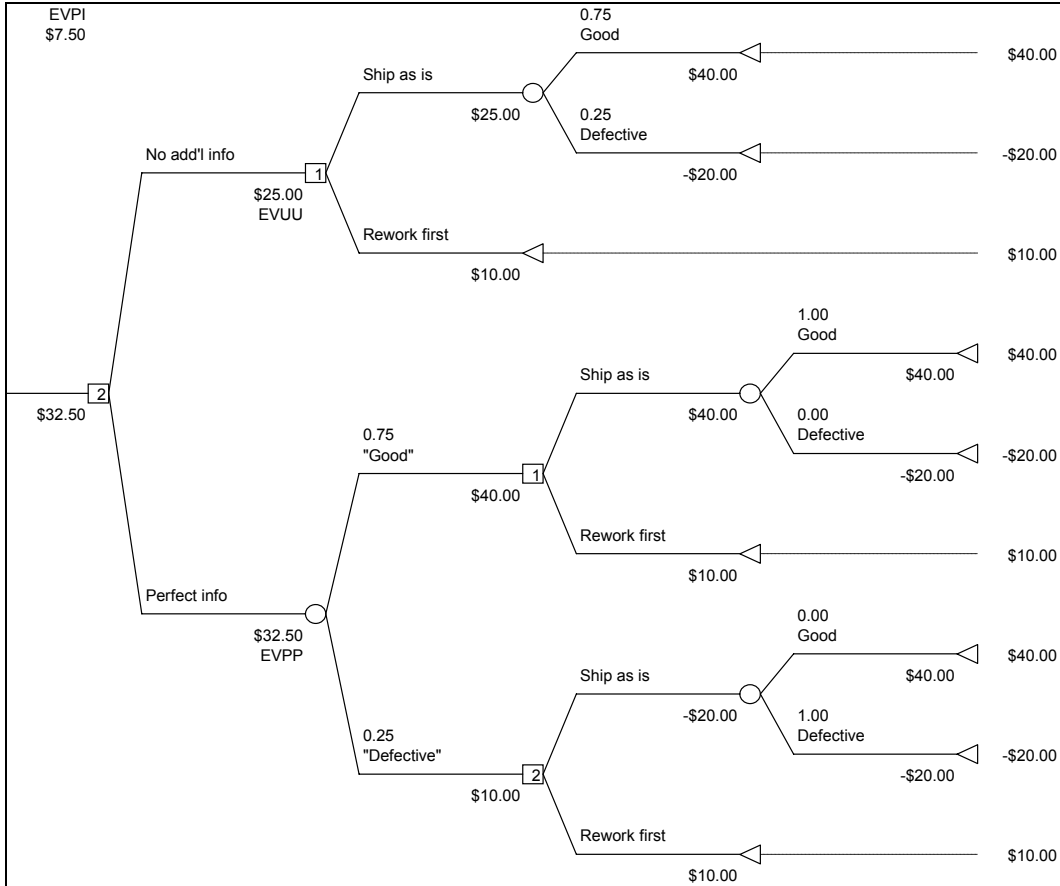
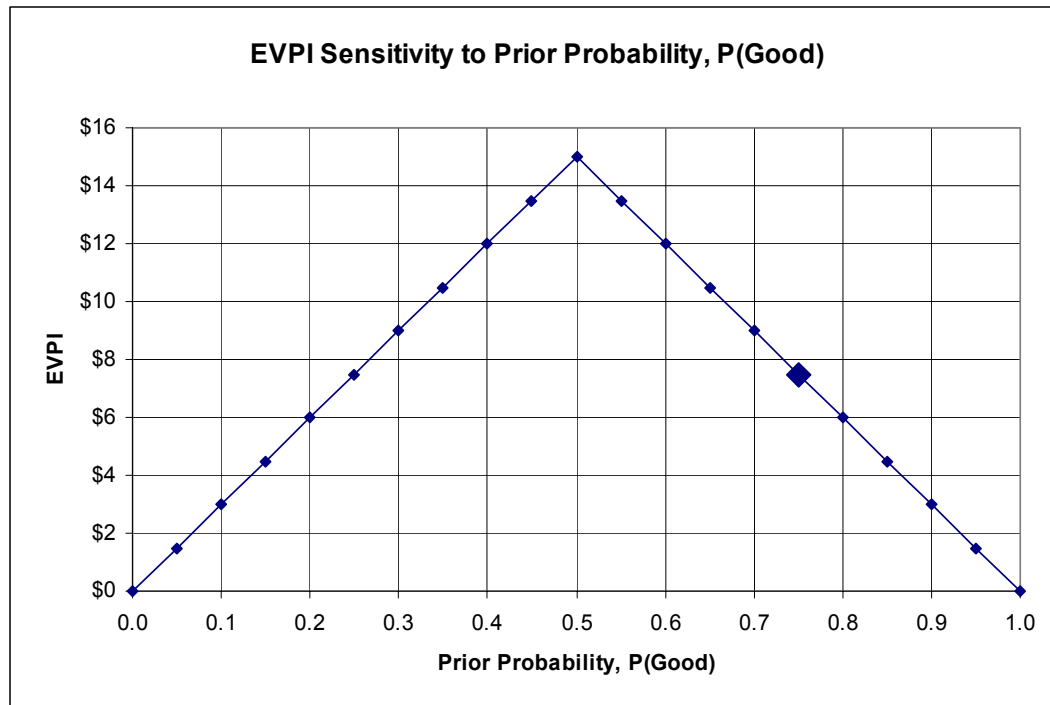


Figure 20.3 EVPI Sensitivity to Prior Probability

20.2 IMPERFECT INFORMATION

An engineer at Technometrics has developed a simple test device to evaluate the component before shipping. For each component, the test device registers positive, inconclusive, or negative. The test is not perfect, but it is consistent for a particular component; that is, the test yields the same result for a given component regardless of how many times it is tested. To calibrate the test device, it was run on a batch of known good components and on a batch of known defective components. The results in the table below, based on relative frequencies, show the probability of a test device result, conditional on the true condition of the component.

Figure 20.4 Likelihoods

Test Result	Component Condition	
	Good	Defective
Positive	0.70	0.10
Inconclusive	0.20	0.30
Negative	0.10	0.60

For example, of the known defective components tested, sixty percent had a negative test result.


An analyst at Technometrics suggested using Bayesian revision of probabilities to combine the assessments about the reliability of the test device (shown above) with the original assessment of the components' condition (25 percent defectives).

This method of assigning probabilities helps to keep the two uncertainties separate. The main event of interest is the condition of a component, either Good or Defective. The information event of interest is the result of the test, either Positive, Inconclusive, or Negative.

Technometrics uses expected monetary value for making decisions under uncertainty. What is the maximum (per component) the company should be willing to pay for using the test device?


When Technometrics has the option to test the component before deciding whether to ship as is or rework, this test portion of their decision problem has the following structure.

Figure 20.5 Structure of the Test Alternative

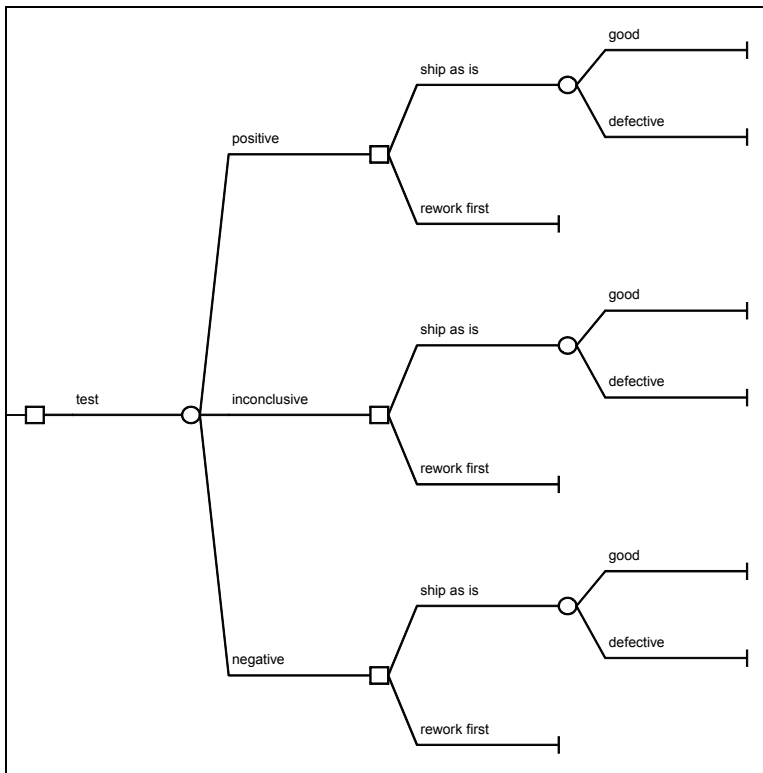

The probabilities we assign to the event branches must be consistent with the prior probabilities of the condition of the component and the likelihoods regarding test results (conditional on the state of the component). Gigerenzer (2002) suggests that most people find it easier to determine the appropriate probabilities by expressing the data as frequencies as shown below.


Figure 20.6 Expressing Prior and Likelihoods as Frequencies

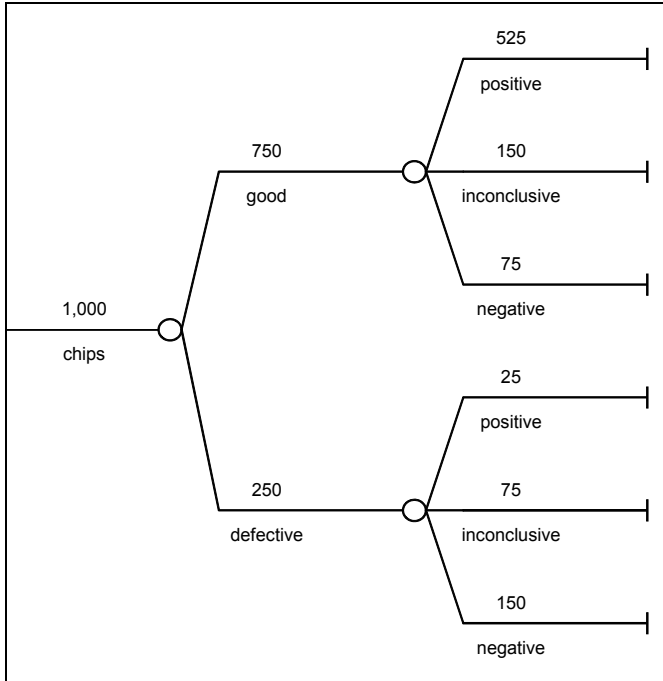

Consider 1,000 chips. To be consistent with $P(\text{Good}) = 0.75$, 750 are good, and 250 are defective. Of the 750 good chips, to be consistent with the likelihood $P(\text{Positive}|\text{Good}) = 0.70$, 70% of the 750 good chips, i.e., 525, have a test result of Positive. The other frequencies on the right side of the figure are consistent with the priors and likelihoods. But the order of the events for this display of input data is the opposite of the order of events for the actual decision problem.

For the actual decision problem, we need $P(\text{Positive})$. That is, if we decide to test, we first see the uncertain test result. From the frequencies, we note that 525 good chips test positive and 25 defective chips test positive. Since a total of 550 chips test positive, we assign probability $P(\text{Positive}) = 0.55$. Similarly, $P(\text{Inconclusive}) = (150+75)/1000 = 0.225$, $P(\text{Negative}) = (75+150)/1000 = 0.225$.

Figure 20.7 Expressing Prior and Likelihoods as Frequencies

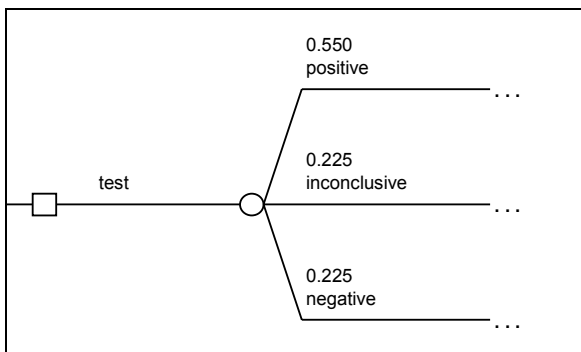


Of 550 chips that test positive, 525 are good chips. So if we observe a positive test result and decide to ship as is, the probability that the chip is good is $P(\text{Good}|\text{Positive}) = 525/550 = 0.9545$. The other probabilities for the test alternative can be determined in a similar way.

20.3 DECISION TREE MODEL

The decision tree shows all probabilities based on the previous calculations.


Figure 20.8 Decision Tree Model

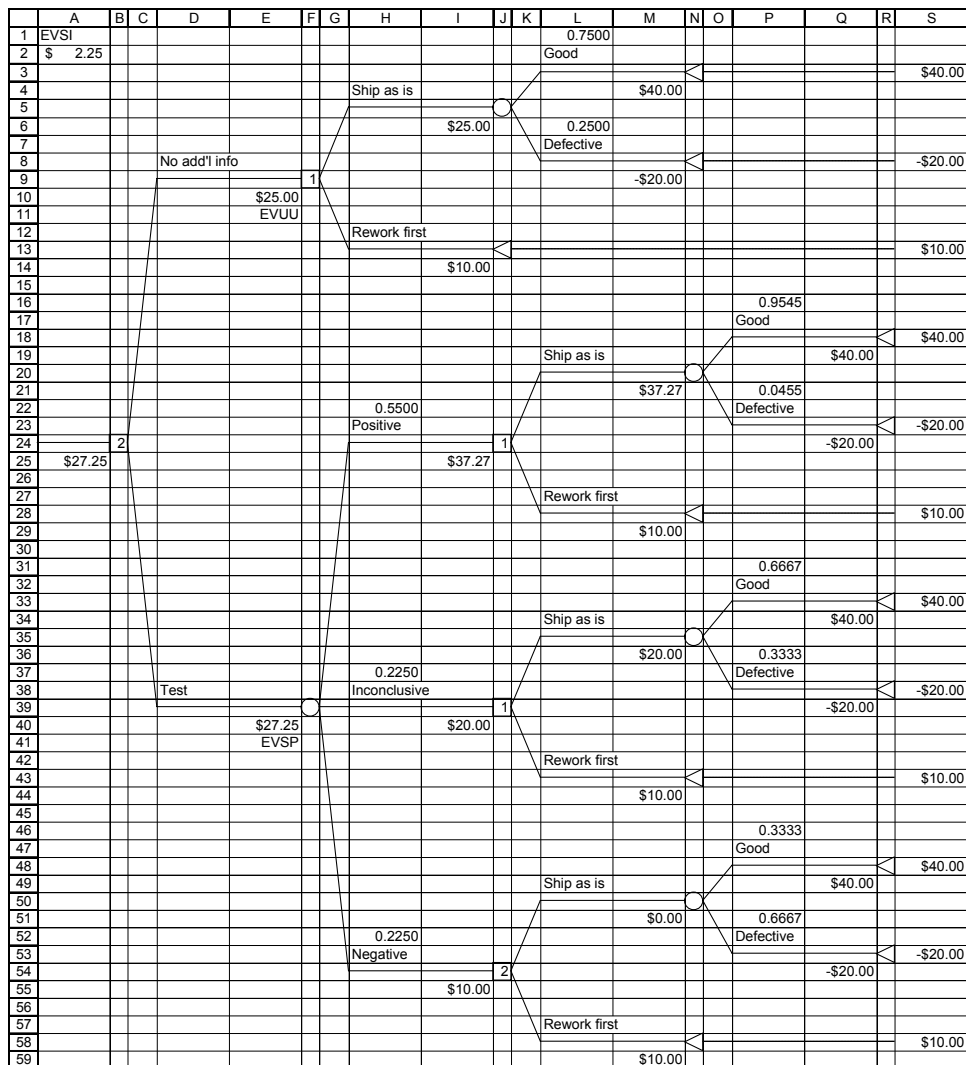

The expected value using the imperfect test is \$27.25. This result is called EVSP = Expected Value using Sample Prediction or the expected value using imperfect information. EVSP is always calculated assuming the cost is zero, i.e., assuming the information is free.

To determine the value of the imperfect information, we see how much better it is compared to making the decision under uncertainty. This value is called EVSI = Expected Value of Sample Information or EVII = Expected Value of Imperfect Information. In general, $EVSI = EVSP - EVUU$, and here $EVSI = \$27.25 - \$25.00 = \$2.25$. We should be willing to pay a maximum of \$2.25 for this imperfect test.

Figure 20.9 EVPI and EVII Sensitivity to Prior Probability

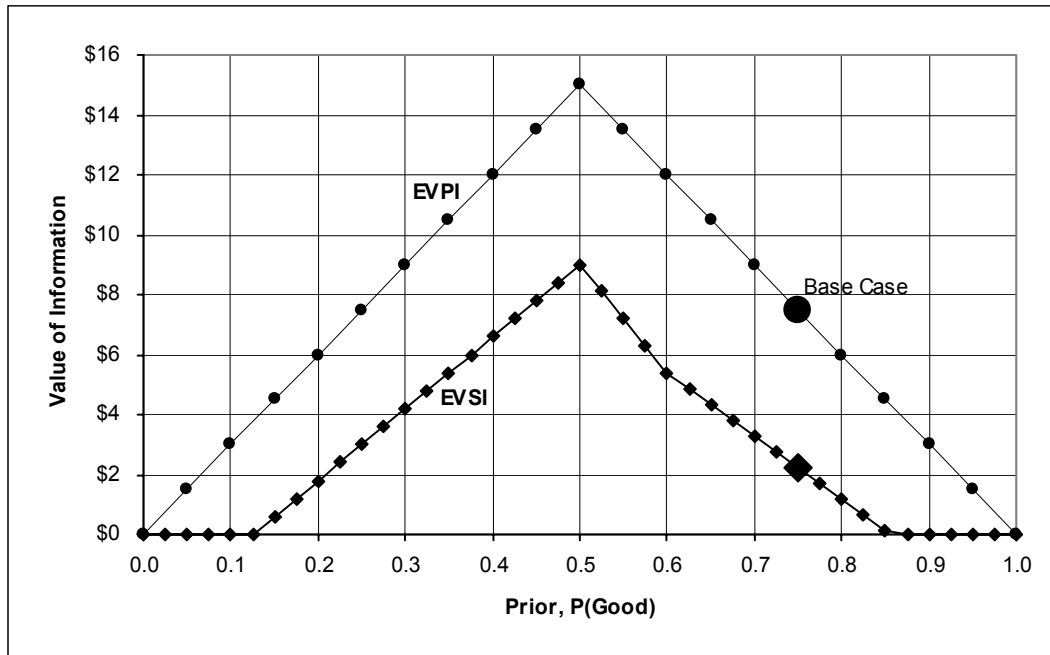

20.4 FREQUENCIES IN TABLES

The frequency calculations can also be arranged in table form.

Figure 20.10 Joint Outcome Table

Test Result	Component Condition	
	Good	Defective
Positive		
Inconclusive		
Negative		

Consider the random process where we select a component at random.

There are six possible outcomes, where an "outcome" is the most detailed description of the result of a random process. Here an outcome is described by the test result and component condition, represented by the six cells shown in the table.

Figure 20.11 Component Condition Frequencies

Test Result	Component Condition	
	Good	Defective
Positive		
Inconclusive		
Negative		
	750	250

For 1,000 chips, we expect 750 Good and 250 Defective.

Figure 20.12 Joint Frequency for Good Chips

Test Result	Component Condition	
	Good	Defective
Positive	525	
Inconclusive	150	
Negative	75	
	750	250

For the 750 Good chips, based on the probabilities 0.7, 0.2, and 0.1, we expect the 750 chips to have test result frequencies of 525, 150, and 75.

Figure 20.13 Joint Frequency for Good and Defective Chips

Test Result	Component Condition	
	Good	Defective
Positive	525	25
Inconclusive	150	75
Negative	75	150
	750	250

Similarly, for the 250 Defective chips, based on the probabilities 0.1, 0.3, and 0.6, we expect the 250 chips to have test result frequencies of 25, 75, and 150.

Figure 20.14 Joint Frequency Table with Row and Column Totals

Test Result	Component Condition		
	Good	Defective	
Positive	525	25	550
Inconclusive	150	75	225
Negative	75	150	225
	750	250	

Figure 20.15 Joint Probability Table with Row and Column Totals

Test Result	Component Condition		
	Good	Defective	
Positive	0.525	0.025	0.550
Inconclusive	0.150	0.075	0.225
Negative	0.075	0.150	0.225
	0.750	0.250	1.000

20.5 SPREADSHEET REVISION OF PROBABILITY

These screenshots show how the probability calculations can be arranged in a worksheet. The label "Main" refers to the main event of interest that affects the outcome values, i.e., whether a chip is Good or Bad. The label "Info" refers to the result of imperfect information, i.e., whether the test result is Positive, Inconclusive, or Negative.

Figure 20.16 Display

	U	V	W	X	Y
1	Prior	0.75	0.25	= P(Main)	
2	Likelihood	Good	Bad		
3	Positive	0.7	0.1	= P(Info Main)	
4	Inconclusive	0.2	0.3		
5	Negative	0.1	0.6		
6					
7	Joint	Good	Bad	Preposterior	
8	Positive	0.525	0.025	0.550	= P(Info)
9	Inconclusive	0.150	0.075	0.225	
10	Negative	0.075	0.150	0.225	
11					
12	Posterior	Good	Bad		
13	Positive	0.9545	0.0455	= P(Main Info)	
14	Inconclusive	0.6667	0.3333		
15	Negative	0.3333	0.6667		

Figure 20.17 Formulas

	U	V	W	X	Y
1	Prior	0.75	0.25	= P(Main)	
2	Likelihood	Good	Bad		
3	Positive	0.7	0.1	= P(Info Main)	
4	Inconclusive	0.2	0.3		
5	Negative	0.1	0.6		
6					
7	Joint	Good	Bad	Preposterior	
8	Positive	=V\$1*V3	=W\$1*W3	=SUM(V8:W8)	= P(Info)
9	Inconclusive	=V\$1*V4	=W\$1*W4	=SUM(V9:W9)	
10	Negative	=V\$1*V5	=W\$1*W5	=SUM(V10:W10)	
11					
12	Posterior	Good	Bad		
13	Positive	=V8/\$X8	=W8/\$X8	= P(Main Info)	
14	Inconclusive	=V9/\$X9	=W9/\$X9		
15	Negative	=V10/\$X10	=W10/\$X10		

20.6 GENERAL PROBABILITY CONCEPTS

An outcome is the most detailed description of the uncertain result of an outcome-generating process.

An event is a collection of outcomes. An event may be a single outcome.

The following general probability concepts are discussed using the event of a Good component and the event of a Positive test result from the Technometric example.

A simple probability is the probability of a single event. For example, $P(\text{Good}) = 0.75$.

A joint probability $P(A\&B)$ is the probability that event A and event B both occur. The occurrences of both event A and event B are uncertain. Joint probabilities do not usually appear on a decision tree. A joint probability is sometimes called the probability of the intersection or the probability of the simultaneous occurrence of two events. For example, $P(\text{Positive}\&\text{Good}) = 0.525$.

A conditional probability $P(A|B)$ is the probability of event A conditional on event B, and by definition, $P(A|B) = P(A\&B)/P(B)$. Outcome B, sometimes called the "conditioning" event, is known to have occurred or is assumed to have occurred. The occurrence of event A is uncertain. Sometimes we say simply that $P(A|B)$ is the probability of A given B. For example, $P(\text{Positive}|\text{Good}) = 0.7$.

20.7 BAYES PROBABILITY CONCEPTS

"Main" represents an event of the main uncertainty that affects payoffs. In the Technometrics problem, the two Main events are Good component and Defective component.

"Info" represents an event of the information-gathering activity. In the Technometrics problem, the three Info events are Positive, Inconclusive, and Negative test result.


$P(\text{Main})$, called a Prior probability in Bayes terminology, is the simple probability of a Main event before any additional information is obtained. This probability is used to determine Expected Value of Perfect Information. For example, $P(\text{Good}) = 0.75$.

$P(\text{Info}|\text{Main})$, called a Likelihood, is the conditional probability of obtaining an Info event, assuming that a Main event has occurred. This probability is used to specify the relationship between an Info event and a Main event, thereby measuring the "accuracy" of the information-gathering activity. Likelihoods do not usually appear on a decision tree. For example, $P(\text{Positive}|\text{Good}) = 0.7$.

Referring to the general definition of conditional probability, the joint probability can be calculated as $P(A\&B) = P(A|B) \cdot P(B)$. For example, $P(\text{Positive}\&\text{Good}) = P(\text{Positive}|\text{Good}) \cdot P(\text{Good}) = 0.7 \cdot 0.75 = 0.525$.

$P(\text{Info})$, called a Preposterior, is the simple probability of an Info event. This probability is calculated by summing joint probabilities. The preposterior is sometimes called the probability of the union of two or more events. For example, $P(\text{Positive}) = P(\text{Positive}\&\text{Good}) + P(\text{Positive}\&\text{Defective}) = 0.525 + 0.025 = 0.55$.

$P(\text{Main}|\text{Info})$, called a Posterior, is the conditional probability of a Main event, assuming that an Info event has occurred. For example, $P(\text{Good}|\text{Positive}) = P(\text{Good}\&\text{Positive})/P(\text{Positive}) = 0.525/0.55 = 0.9545$.

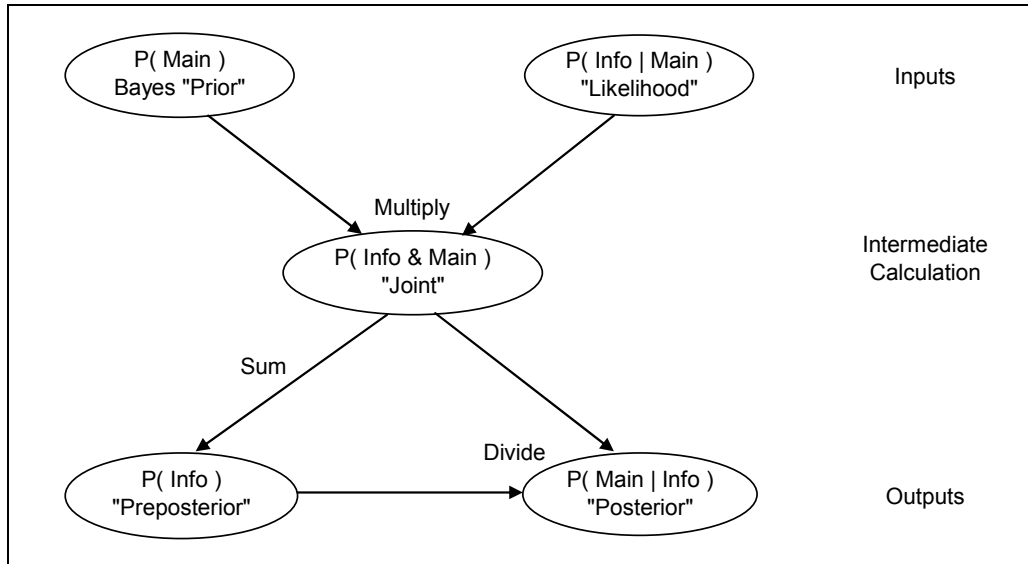Figure 20.18 Formulas for Revising Probabilities

Bayes Rule is a formula that shows how the posterior probability can be computed from the priors and likelihoods, without explicitly identifying the intermediate computations of the joint probabilities and preposteriors. By the definition of conditional probability, an example of a posterior is

$$P(\text{Good}|\text{Positive}) = P(\text{Positive}\&\text{Good}) / P(\text{Positive})$$

The simple probability $P(\text{Positive})$ can be expressed as the sum of the joint probabilities for the two ways that the event Positive can occur.

$$P(\text{Good}|\text{Positive}) = P(\text{Positive}\&\text{Good}) / [P(\text{Positive}\&\text{Good}) + P(\text{Positive}\&\text{Defective})]$$

Applying the definition of conditional probability again, each joint probability can be expressed as the product of a conditional probability and a simple probability.

$$P(\text{Good}|\text{Positive}) =$$

$$P(\text{Positive}|\text{Good}) * P(\text{Good}) / [P(\text{Positive}|\text{Good}) * P(\text{Good}) + P(\text{Positive}|\text{Defective}) * P(\text{Defective})]$$


This last expression, written to show how the posterior output is a function of the prior and likelihood inputs, is an example of Bayes Rule.

20.8 BAYES REVISION BY FLIPPING PROBABILITY TREES

1. Draw a probability tree with the main event branches on the left and the info event branches on the right.
2. Put the prior probabilities on the main event branches.
3. Put the likelihoods on the info branches.
4. Multiple each prior times each likelihood, and put the joint probability at the end of the tree on the far right.

After completing the first four steps, the probability tree showing the input data and the calculated joint probabilities is shown below.

Figure 20.19 Probability Tree for Inputs and Joint Probabilities

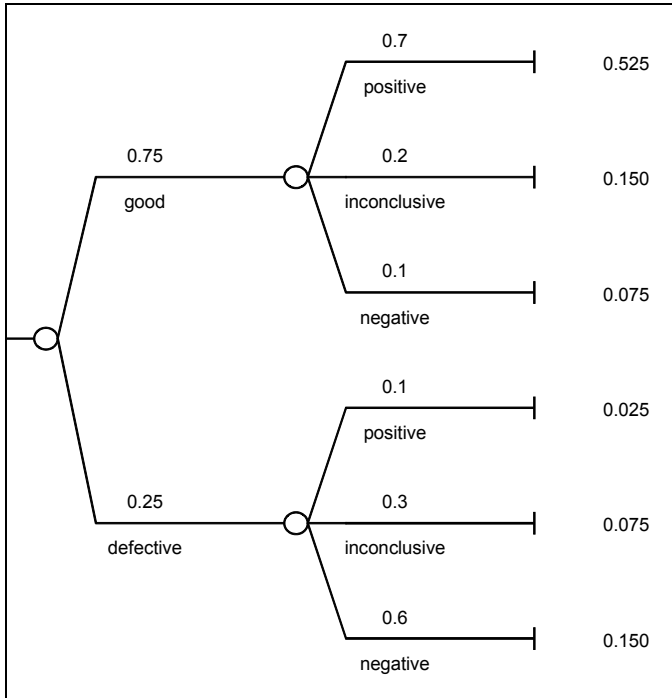

5. Draw a probability tree with the info event branches on the left and the main event branches on the right.
6. Put the joint probability at the end of the tree on the far right. Note that the order is different from the input tree, but each joint probability corresponds to a unique combination of an info event outcome and a main event outcome.
7. Sum the joint probabilities at the end of the tree to obtain the probability of each info event outcome on the far left. For example, sum 0.525 and 0.025 on the far right to obtain 0.550 on the far left.
8. To calculate the conditional probability of the main events (posterior probabilities), divide the joint probability on the far right by the probability on the far left (preposterior). For example, 0.525 divided by 0.550 equals 0.9545.

Figure 20.20 Probability Tree for Outputs of Bayes Revision

